



Parachutes Australia



Thinback Parachute Manual

S/N: _____

DATE OF MANUFACTURE: _____

Manufactured by:



Parachutes Australia

35/317 Woodpark Road, Smithfield, NSW 2164, AUSTRALIA

Ph. (02) 97572355 Fax (02) 97572471

TABLE OF CONTENTS

TABLE OF CONTENTS	i
W A R N I N G !!!.....	1
WARRANTY.....	2
1.0 THINBACK TEST STANDARD	3
2.0 THINBACK CONFIGURATIONS.....	4
3.0 FITTING & ADJUSTMENT.....	6
4.0 OPERATING INSTRUCTIONS	7
4.1 RIPCORD OPERATION (ALL MODELS).....	7
4.2 STATIC LINE OPERATION (MODEL T104).....	8
4.3 UNDER CANOPY	9
4.4 STEERING THE PARACHUTE.....	10
4.5 LANDING PROCEDURE (GENERAL).....	11
4.6 EMERGENCY LANDINGS	12
5.0 OPERATING LIMITATIONS.....	13

6.0	MAINTENANCE	14
6.1	DAILY MAINTENANCE	14
6.2	MINOR REPAIR.....	14
6.3	MAJOR REPAIR	14
6.4	AN ALTERATION.....	14
6.5	REPAIR METHODS.....	15
6.6	MODIFICATON (RECALL).....	15
6.7	SERVICE LIFE	15
6.8	STORAGE	15
7.0	INSPECTION AND PACKING	16
7.1	AIRING AND DRYING (ALL MODELS).....	16
7.2	INSPECTION (ALL MODELS)	16
8.0	CLOSING LOOP INSTALLATION (ALL MODELS)	17
8.1	CLOSING LOOP INSTALLATION MODEL - T101 & T102.....	17
8.2	CLOSING LOOP/STATIC LINE INSTALLATION - MODEL T104	17
9.0	PACKING SEQUENCE – MODEL T102 & T104	18
10.0	PACKING SEQUENCE - MODEL T101	23
11.0	CLOSING THE CONTAINER (ALL MODELS).....	27
12.0	CONTINUING PRODUCT	28
13-0	REPLACEMENT PARTS & MATERIALS	28

WARNING !!!

RISKS OF GLIDING

- Gliding has caused death and serious injuries.
- Emergency parachutes do not always open properly, due to pilot error.
- Emergency equipment can fail even if all possible precautions are taken by the pilot.
- Failure to activate the main or reserve parachute (or execute emergency procedures) at a safe altitude, and/or equipment failure can result in serious injury or death.

PILOT RESPONSIBILITIES

- Read and strictly follow all operating instructions and all manufacturer's specifications, instructions, advice and requirements for use of the equipment.
- Never attempt to use equipment prepared or assembled by unqualified persons.
- Use only manufacturer recommended compatible components.
- Examine and replace any defective, worn or deteriorated component of the equipment.
- Examine all gear and equipment, including all fittings, buckles, snaps and other fasteners before use of any parachute product.
- Use only those products designed for parachute use.
- Do not exceed recommended or stated forces, speeds or other factors regarding safe use of equipment.
- Read and follow all warning labels, manuals, instructions, training or other experience requirements and recommendations and all recognised parachute procedures.
- Check the ripcord handle and pins for security (and static line hook up if applicable) before each launch.
- Comply with all product recall notices, mandatory modifications and/or Rigging Advisory Circulars (RACs) relating to the equipment.

FAILURE TO FOLLOW ALL WARNINGS, INSTRUCTIONS AND REQUIRED PROCEDURES MAY RESULT IN SERIOUS INJURY OF DEATH

WARRANTY

PARACHUTES AUSTRALIA expressly warrants that these goods will be free from defects arising from faulty material and workmanship. The liability of Parachutes Australia is limited to the replacement of defective parts found upon examination to be defective in material or workmanship within 21 days of purchase. This warranty does not apply to goods that have:

- a. Not been used in accordance with the express or implied instructions and specifications of Parachutes Australia;
- b. Altered or repaired in any way;
- c. Been subjected to abuse, misuse, abnormal stress or strain, or neglect of any kind;
- d. Become directly or indirectly defective from wear and tear;
- e. Been used after the discovery of any defect or deficiency that has not been rectified by Parachutes Australia after the purchaser has notice of such defect or deficiency.

Parachutes Australia will not accept goods returned without prior arrangement.

1.0 THINBACK TEST STANDARD

The Thinback Parachute Assembly has been tested to the requirements of Department of Aviation, Air Navigation Order ANO 103.18 Equipment Standards – Emergency Parachutes.

To demonstrate compliance with ANO 103.18, the United States Federal Aviation Administration, Technical Standard Order T.S.O – C23b was used as the specification.

Parachutes Australia holds both Certificates of Type Approval (CTA) issued by the Australian Department of Aviation and letters of TSO Authorisation from the United States FAA for the various component parts that make up the Thinback Parachute Assembly.

The Thinback Parachute Assembly will meet the requirements for a ‘Standard’ category parachute provided the canopy fitted to the Thinback pack and harness has been certified to the standard type category.

Where a ‘Low speed type’ category parachute canopy is fitted to the Thinback pack and harness assembly, the resulting assembly must be identified as a Low Speed Parachute and is limited to use in airplanes under 150mph.

2.0 THINBACK CONFIGURATIONS

2.1 The Thinback pack and harness assembly is manufactured in a range of configurations for various military and civil applications as follows:

2.2 T100 PARACHUTE, DESPATCHER, AUSTRALIAN ARMY, consisting of the following primary parts:

S005-A-2	Pack and harness assembly
H030-1	Ripcord for S005-A-2 Thinback
P008A-N	Canopy, 26' Lopo, modified, W/net skirt
B021	Pilot Chute
B021(S)	Strap, Pilot Chute B021
B019	Bridle cord, 1 metre
B069	Closing loop, Thinback S005(A), S005-A-2, S005-A-3
A024	Manual T100 Parachute

2.3 T101 THINBACK PARACHUTE assembly, low speed category, civil use, consisting of the following primary parts:

S005(A)	Pack and harness assembly
H006	Ripcord for S005(A) Thinback
P015-1	Canopy, Aerolite
B021	Pilot Chute
B021(S)	Strap, Pilot Chute B021
B019	Bridle cord, 1 metre
B069	Closing loop, Thinback S005(A), S005-A-2, S005-A-3
A043	Manual, Thinback Parachute

2.4 T102 THINBACK PARACHUTE assembly, standard category, civil use, consisting of the following primary parts:

S005(A)	Pack and harness assembly
H006	Ripcord for S00(A) Thinback
P008A-N	Canopy, 26' Lopo, modified, W/net skirt
B021	Pilot Chute
B021(S)	Strap, Pilot Chute B021
B019	Bridle cord, 1 metre
B069	Closing loop, Thinback S005(A), S005-A-2, S005-A-3
A024	Manual Thinback Parachute

2.5 T103 PARACHUTE, DESPATCHER, RAAF, consisting of the following primary parts:

S005-A-3	Pack and harness assembly
H030-2	Ripcord for S00-A-2 Thinback
P008A-N	Canopy, 26' Lopo, modified, W/net skirt
B021	Pilot Chute
B021(S)	Strap, Pilot Chute B021
B019	Bridle cord, 1 metre
B069	Closing loop, Thinback S005(A), S005-A-2, S005-A-3
A059	Manual T103 Parachute

2.6 T104 THINBACK PARACHUTE, assembly static line/ripcord deployed, standard category, civil use, consisting of the following primary parts:

S005-G	Pack and harness assembly
H006-1	Ripcord for S00-G Thinback
P008A	Canopy, 26' Lopo, modified
B021-A	Pilot Chute, Slimpack/Thinback
B074	Static line, Thinback S005-G
B077	Closing loop, Thinback S005-G
B019	Bridle cord, 1 metre
A043	Manual, Thinback Parachute

2.7 If component parts are purchased separately, alternative parts may be substituted provided they meet the following criteria: (Extract from FAA Advisory Circular AC 105.2A)

“Assembly or mating of parachute components from different manufacturers may be made by a certified and appropriately rated parachute rigger or parachute loft without further authorisation by the manufacturer. Each component of the resulting assembly should function properly and may not interfere with the operation of the other components. Any questions about the strength or operation should be resolved by actual tests by the rigger or loft to make certain the parachute is safe for emergency use.”

2.8 This manual provides information on the operation of the T101, T102, and T104 Thinback Parachutes. For information on the operation of the T100 Parachute refer to Part No. A024. For information on the operation of the T103 Parachute refer to manual Part No. A059.

3.0 FITTING & ADJUSTMENT

The Thinback Parachute Assembly is designed to be worn over coveralls or other form fitting clothing.

NOTE: Excessively loose clothing will make it difficult to observe the harness fittings when donning and may obscure the ripcord handle during use.

The harness is adjustable in five places:

- i) The chest strap
- ii) The left leg strap adjustable 'V' ring
- iii) The right leg strap adjustable 'V' ring
- iv) The left shoulder adjustable adaptor
- v) The right shoulder adjustable adaptor



The chest strap should be positioned at mid-chest level.

- The leg straps pass around each thigh and the adjustable 'V' ring connects to the snap on the front strap. Each leg strap should be adjusted up until snug, but not uncomfortably tight.
- The two shoulder adjustable adaptors vary the length of the front harness. These are only used for wide variations in the length of the trunk which cannot be taken up with adjustments to the leg strap length.

4-0 OPERATING INSTRUCTIONS

4-1 RIPCORD OPERATION (ALL MODELS)

The Thinback Parachute Assembly is manually activated.

The ripcord handle is to be firmly gripped with the right hand, removed from the pocket and pulled to full arms length, across the body.



The parachute will normally open fully within 3 seconds of activation.

If an emergency arises which requires a quick exit from the aircraft, carry out the following steps:

- i) Check altitude above ground level.
- ii) If low (below 3000ft AGL) clear the aircraft and pull ripcord immediately.
- iii) If high (above 3000ft AGL & below 10,000ft AGL) clear aircraft , delay ripcord pull for 5 seconds.
- iv) If very high (above 10,000ft AGL) do not put immediately but delay until altitude is lower.

Remember the outside air temperature may well be below freezing point. If you observe the ground rush up, pull ripcord immediately.

- The T104 Thinback Parachute may be ripcord or static line deployed.
- If the parachute is to be static line deployed the static line carabina snap must be connected to a strongpoint inside the aircraft.
- The static line is 6 metres long and is stored under a velcro closed flap on the top outside of the Thinback.
- The static line strongpoint should be located behind or beside the seat position. It is important that a clear path is maintained between the static line anchor point and the stowage pouch as the user leaves the aircraft during a flight emergency.
- If the static line is to be used regularly the carabina snap should be stowed on the left shoulder.
- If it is not used regularly it is suggested that the carabina and all the static line webbing be stowed in the pouch at the back.


Refer to section 8.0 for recommended stowage method.

Once suspended under the parachute canopy, your rate of descent will stabilise at approximately 17.9 ft/sec with a 77kg (170lb) body weight.

This rate of descent is based on the Parachutes Australia 26' Lopo Conical Canopy (part P008A) or the Aerolite Canopy (Part No P015-1) being fitted into the Thinback pack and harness assembly.

Parachute canopies from other manufacturers may have a different rate of descent.

Your parachute will look circular in shape and, being 'modified' for steering, it will have three vents facing towards the rear, which give a 3 to 10kt airspeed (depending upon body weight and altitude) in the direction you are facing.

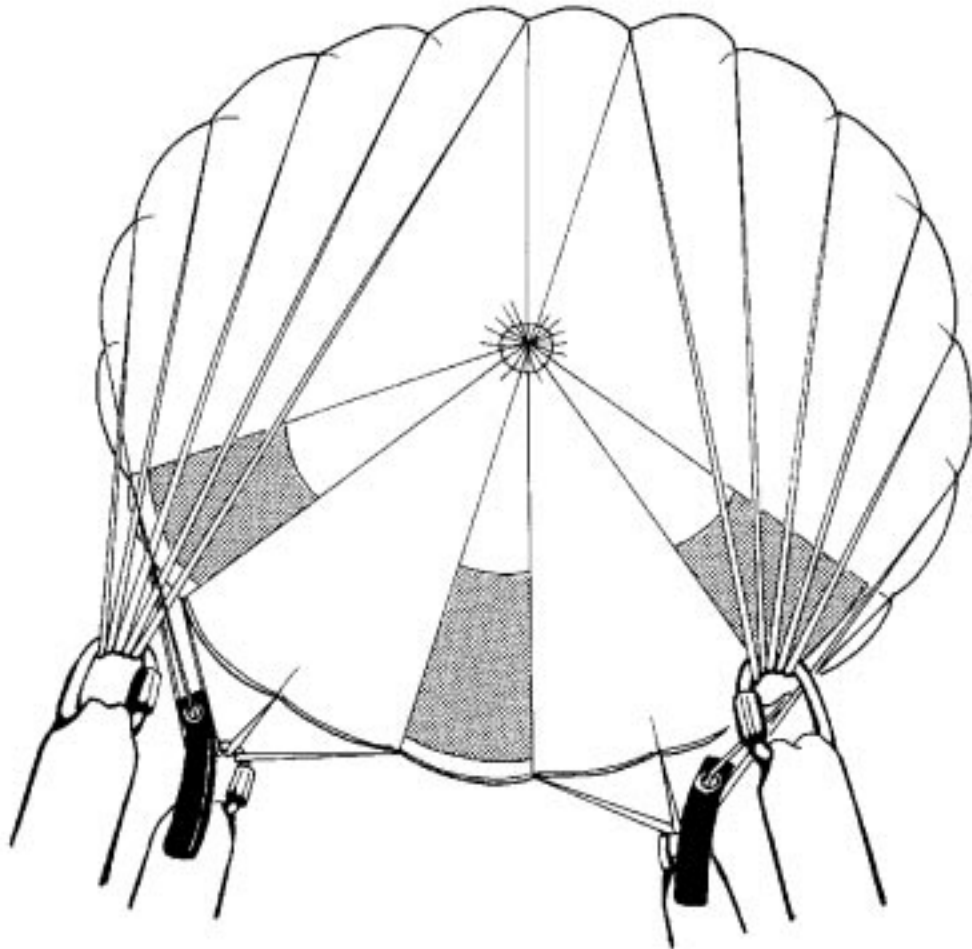


- The parachute can be turned to the left or right or completely around, by operating the left or right steering toggles, or the rear risers if toggles are not fitted.
- The parachute will fly straight ahead if neither steering toggles is touched.
- To turn the parachute to the left (port) the left side steering line must be grasped and pulled down to chest level.
- The parachute will continue to turn until the steering line is released. The parachute




will stabilise in 3 to seconds and then assume a 3 to 10kt airspeed in the new direction. It takes 10 seconds to complete a 360° turn.

- As with aircraft flight, the wind speed and direction will influence your 'track' across the ground.
- Choose a heading to achieve a track across the ground towards the best landing area available (downwind).
- As a guide, your glide angle is approximately 45° to the horizontal in light winds.

- The parachute should be manoeuvred so that you are facing into wind for landing.
- As with other forms of flight, this minimises your speed over the ground at the time of landing.
- The normal procedure for assessing ground wind such as smoke, cloud shadows, ripples on water and grass should be used.
- Use either left or right steering toggles to turn the parachute so you are facing 'into wind' and prepare for the landing.
- Lock your legs together from thighs to ankles. Bend knees slightly forward and brace yourself as if you were to jump off a 2 metre high platform.

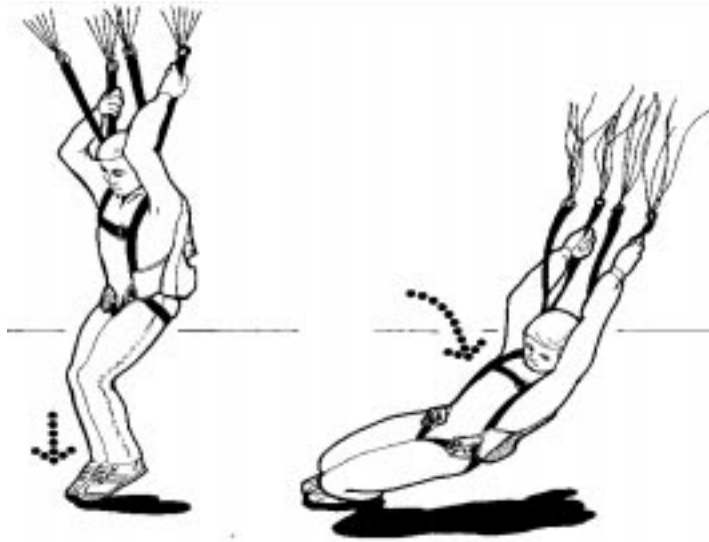

- Roll your body along your side to absorb landing shock.

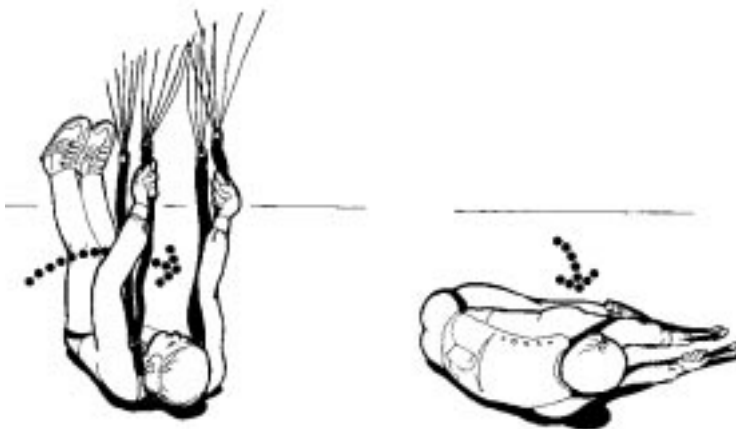

4-6.1 WATER LANDING

- Turn the parachute to face 'into wind' to land as you would for a normal landing. *Facing into wind is absolutely necessary for all water landings.*
- Release the chest strap as you descend under the parachute. This will save time in the water.
- If you land in water facing 'into wind', you may be towed across the water on your back (face up) if wind strength is high.
- If you land facing 'down wind', you will enter the water face down and may be dragged under.
- After landing in the water, release both leg strap snaps. Discard the parachute and swim away.
- Always head up wind and up current away from the parachute to avoid entanglement.
- Once water logged, the parachute will sink!

4-6.2 POWER LINE LANDING

- Steer away from power lines by turning the parachute to face away from them.
- If unable to avoid power lines, place feet together, turn head to the side and try not to touch more than one line.
- If suspended above the ground, make sure power has been disconnected before a rescue attempt is made.

4-6.3 TREE LANDING

- Always steer the parachute to avoid trees.
- If a tree landing is unavoidable, place feet and knees together, tuck elbows into stomach, protect your face with your hands. Place chin on chest.

4-6.4 DRAGGING AFTER LANDING

- The parachute may remain inflated after landing, if winds are greater than 10kts.
- If being dragged across the grounds by high winds, roll onto your back. The backpack will provide some protection from abrasion.
- Reach up and grasp one of the lower rigging lines of the parachute and pull down hand over hand until the canopy is distorted enough to collapse.

5-0 OPERATING LIMITATIONS

Minimum deployment height:	500ft AGL
Weight range:	50kg (110lb) to 113-5kg (250lb)
Stability:	$\pm 5^0$ from vertical at gross wt.
Height loss during opening:	300ft
Ripcord pull force:	23 N (5lbf) min. 97 N (22lbf) max.
Forward drive:	3-10 knots (depending upon weight)
Steerability:	360 ⁰ in 10 secs at gross weight
Opening time:	3 secs (normal opening)

6-0 MAINTENANCE

The responsibility for maintenance and repair of the Thinback Parachute lies with appropriately qualified parachute rigger or packer.

Any suspected damage from acid, oil, water, chaffing, cuts, burred fittings, wear, sunlight, etc., should be referred to an approved maintenance workshop.

Repairs may only be classified as repairs when they restore the parachute to its original condition. Repairs are classified as daily maintenance, minor repair or major repair.

6-1 DAILY MAINTENANCE

Shall mean the replacement of component parts which require assembly only. Daily maintenance is within the scope of a parachute packer (Australian Parachute Federation "A" Packer, or the foreign equivalent).

6-2 MINOR REPAIR

A repair other than a major repair is classified as a minor repair. For example, a ripcord pocket repair, hand tacking, stain removal, canopy patch. All minor repairs are within the scope of a parachute rigger (Australian Parachute Federation Class "B" Rigger, or the foreign equivalent).

6-3 MAJOR REPAIR

A repair, if improperly accomplished, might appreciably affect strength, performance, flight characteristics or any other factor effecting airworthiness. A major repair is within the scope of a parachute rigger (Australian Federation Class "B" Rigger, or the foreign equivalent).

6-4 AN ALTERATION

Is any change in the configuration of any portion of a parachute assembly from its original manufacturer specifications.

Any alteration must only be carried out by the manufacturer or with his written approval.

6-5 REPAIR METHODS

The only approved method of repair is the re-manufacture of complete factory-like replacement of the damaged area. In making the repair, the parachute itself should be used as the model. All parts, seams and methods should exactly duplicate the original. For repair techniques, refer to “The Parachute Manual”, author Dan Poynter, ISBN 0-915516-35-7, particularly Section 7.0.

6-6 MODIFICATON (RECALL)

A modification order shall be raised and issued to the owner/operator of the parachute whenever:

A superior part or material becomes available which will improve the parachute’s performance and/or reliability, or
A defect becomes evident which requires the parachute to be recalled and modified.

Modification orders shall be numbered and be classified as mandatory or optional.

6-7 SERVICE LIFE

The Thinback Parachute assembly has a maximum service life of 20 years from the date of manufacture stamped on the parachute back (whether used or in storage), due to the natural degradation of the nylon used for its manufacture. The parachute canopy fitted to the Thinback Parachute pack and harness assembly may have service life which differs from the pack and harness. Time expired components must be removed and replaced with serviceable components in order for the complete parachute to remain in service.

Some countries have a finite life on all parachutes which is less than that specified by the manufacturer. Where this is the case the country’s regulations shall prevail.

6-8 STORAGE

The Thinback Parachute must be stored in dry shaded conditions, away from excessively high temperature and humidity when not in use.

7-0 INSPECTION AND PACKING

The Thinback Parachute must be maintained, packed and operated in accordance with this manual or in accordance with an approved manual which contains these maintenance and packing procedures.

Parachutes Australia, as the manufacturer, authorises the Thinback Parachute to remain in service for a maximum period of 8 months between each mandatory inspection and repack.

However, where the statutory regulations of the country of use require a lesser in-service period than the 8 months authorised by the manufacturer, the lesser period shall apply.

NOTE: Australian Air Navigation Orders require an emergency or reserve parachute to have been inspected and repacked in the preceding 6 months.

A Thinback parachute which has been damaged or found unserviceable, must not be worn unless it has been repaired and certified as serviceable by a current Australian Parachute Federation Class “B” Rigger, or a holder of the foreign equivalent rating.

7-1 AIRING AND DRYING (ALL MODELS)

Prior to being repacked, the Thinback Parachute canopy must be hung by the apex for a period of 24 hours, out of direct sunlight, without the canopy coming in contact with the floor. Lines should be loosely chain linked and placed in the pack tray.

7-2 INSPECTION (ALL MODELS)


Prior to packing, the Thinback Parachute must be inspected.

- Stretch the canopy, rigging lines and harness out on the packing table.
- Remove any tangles from the canopy, rigging lines and harness.
- Attach the canopy apex to one end of the table.
- Attach the ‘rapide’ connector links to the tensioning device at the other end and apply 30 kg (approx.) tension.
- Examine the complete parachute assembly for holes, tears, sears, broken and loose stitching, wear and contamination by oil and acid.
- Examine metal harness fittings for burrs, nicks, broken springs and rust.
- Check ‘rapide’ connector links are correctly tensioned. They should be tightened by hand, then tensioned ¼ turn with a spanner.

8-0 CLOSING LOOP INSTALLATION (ALL MODELS)

8-1 CLOSING LOOP INSTALLATION MODEL - T101 & T102

Take two closing loop assemblies (as shown in the figure below) and mount them through the container floor as shown on page 19.



8-2 CLOSING LOOP/STATIC LINE INSTALLATION - MODEL T104


A static line (part number B074), two closing loops (part number B077) and a ripcord (part number H006-1) are required for the static line Thinback.

- Smear a very thin film of clear non-staining sewing machine oil over both cables with a lightly oiled rag. This procedure is necessary to maintain a static line pull force of less than 97 N (22 lbf).
- Ensure the oil does not come in contact with the parachute canopy.
- Feed two static line cables through the grommet located behind the 50mm wide velcro pile pocket in the static line stowage pouch.
- Fold the velcro hook over the outside of the velcro pile pocket to secure the cable in place.
- Take two closing loops and pass one over the end of each cable.
- Slide the loops along each cable. The loop on the shorter cable must pass through the grommet closest to the top of the container.
- After passing the loop on the longer cable through the lower grommet, the excess cable must be stowed in the webbing tube pocket on the inside bottom of the container tray.
- Use the three (3) rubber bands on each side of the stowage pouch to secure the static line in place.
- The first three (3) metres of static line should be stowed in the lower two bands.
- The next two (2) metres should be stowed in the middle bands.
- The last metre should be stowed in the upper rubber bands.
- If the Thinback parachute is to be regularly static line activated, the carabina should be stowed in the keeper over the left shoulder.
- If not, the carabina is to be stowed inside the static line pouch.


9-0 PACKING SEQUENCE – MODEL T102 & T104

The T102 & T104 Thinback Parachute use the P0008A 26' Lopo conical canopy.

- The master panel (No. 1) of the canopy should be facing up.
- Complete a 4-line check with lines number 1 & 24 and 12 & 13.
- Flake the canopy in the manner you are accustomed to.
- Lay the canopy down and pleat each gore ensuring 1 to 12 lay one side and 13 to 24 lay the other side.
- Visually check up the centre of the canopy to confirm that all gores are clear.
- Straighten the apex. The periphery should now align with ± 25 mm. See Fig.

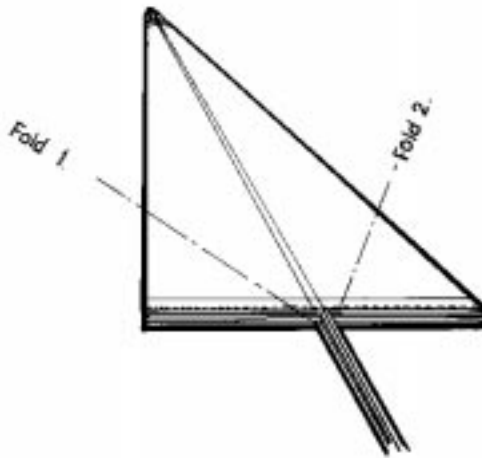


- Fold (triangulate) the periphery of the canopy along fold line 1 & 2, as shown above.
- The canopy should now resemble Fig. below:

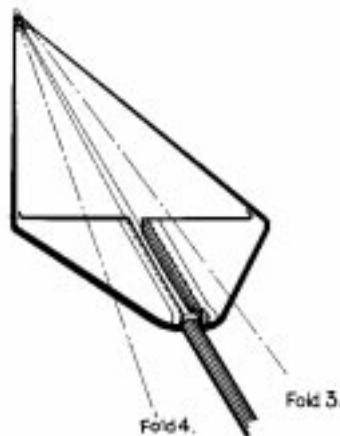


- Fold (longitudinally) the canopy into one third its width along fold line 3 & 4 on Fig. (see previous page).
- The canopy should now resemble Fig below:



- Use two or three shot bags to hold the canopy in place.
- Lay the risers down either side of the pack tray as shown in Fig. Below.
- Allow a 200mm length of the front lift web between the chest strap and the shoulder adjustable adaptors to suit the average man.

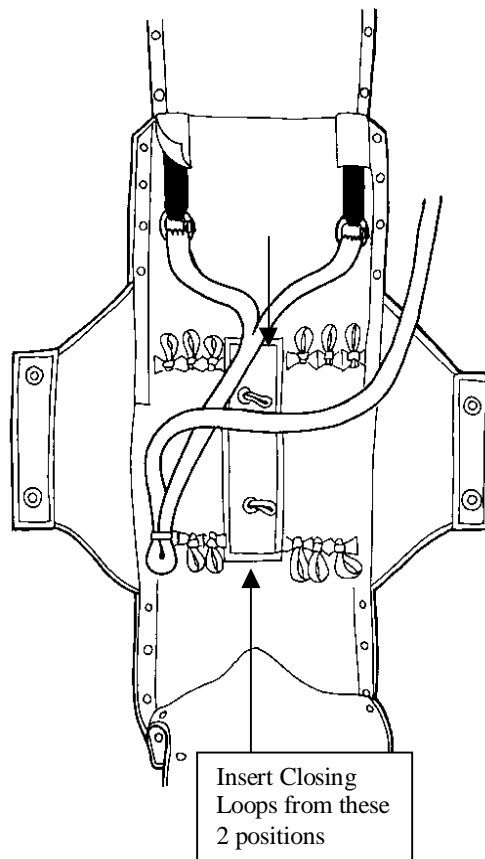


- Also, leave some line slack between the rapide connector links and the first line stow to allow some front lift web adjustment for individuals who are taller than average.
- Continue line stowage as illustrated in Fig. below until the periphery is within 300mm.

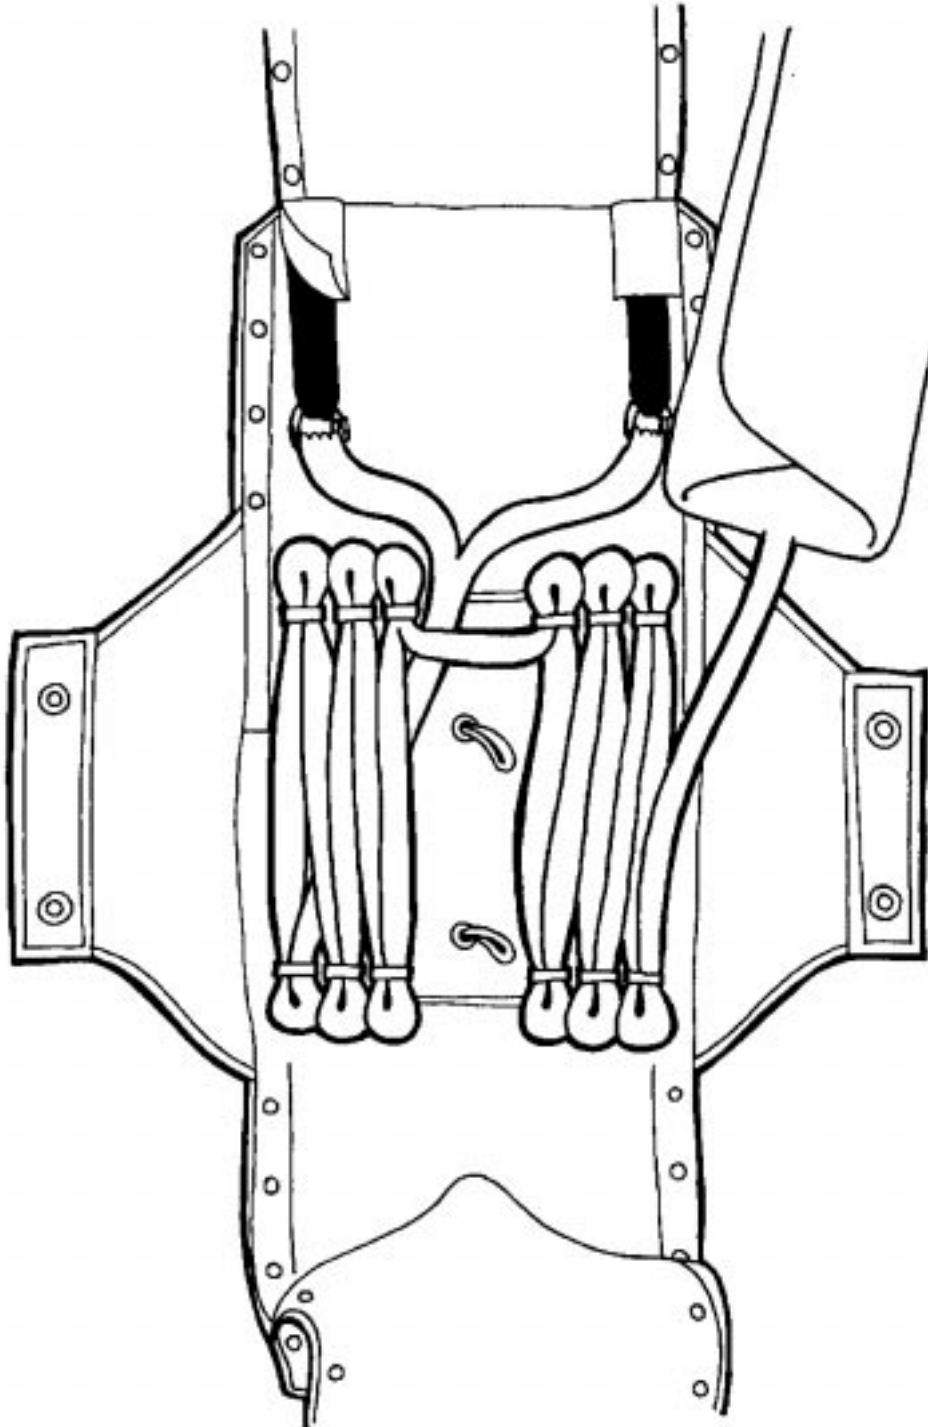


10-0 PACKING SEQUENCE – MODEL T101

The T101 Thinback Parachute uses the Aerolite model P015-1 canopy.


- Flake the canopy in the manner you are accustomed to.
- Lay the canopy down and pleat each gore, ensuring equal numbers (10) lay on each side.
- Visually check up the centre of the canopy to confirm that it is clear.



- Straighten the apex. All rigging lines at the periphery should align within ± 25 mm.
- Next fold the canopy into thirds bringing each side across as shown in Fig. below:




- Fold the periphery over so that the grommets are level with the *Nitrile Rubber 'O' Rings on the mouth lock. See Fig. below:



* PA Part Number M138-2 Nitrile Rubber 'O' Ring or commercial equivalent must be used for the mouth lock. Regular bands can be used elsewhere.


Stow the left and right line groups separately in the respective * Nitrile Rubber 'O' Ring as illustrated in Fig. below:



- Use regular rubber bands to stow the left and right line groups together as shown in Fig. below:




- Continue to the remaining lines as shown in Fig. below:

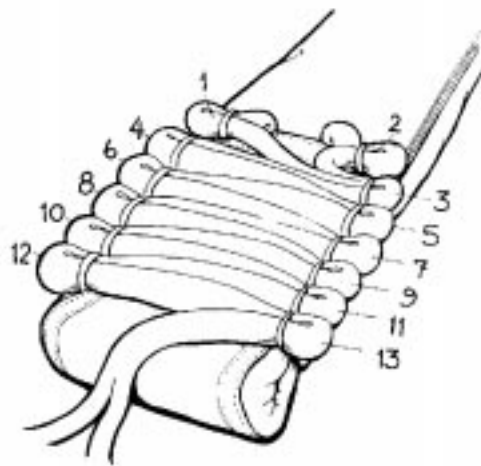


11-0 CLOSING THE CONTAINER (ALL MODELS)

- The periphery (skirt) of the canopy is stowed in the bottom right hand corner of the pack, as illustrated in Fig. below.
- Proceed to stow the canopy up the right hand side, then make a “V” across the centre (top) and stow down the left side to the bottom of the left hand corner.

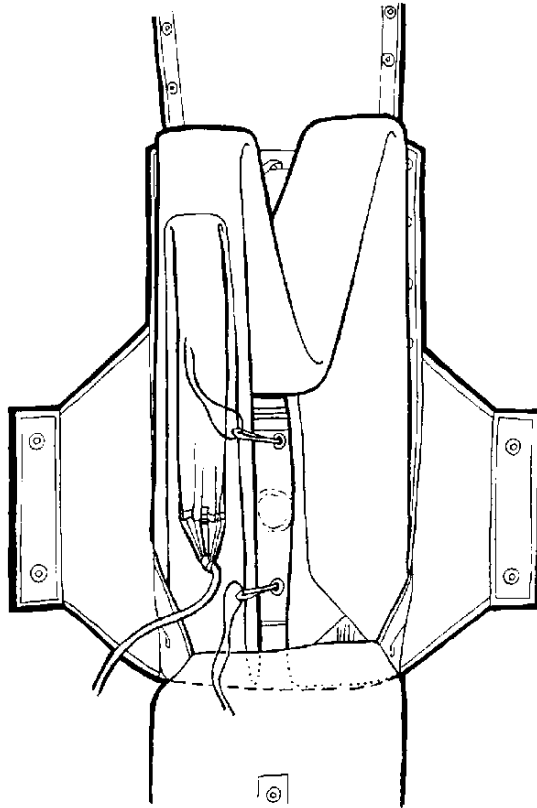


- Fold the remaining canopy back on top of itself as illustrated in Fig. to add an equivalent amount of bulk to the left side of the pack.
- Arrange the folds so that the centre closing loops are clear of canopy material. Insert two pull-up cords of gutted MIL-C-5040 type III line for the closing stage.
- To close the pack, the top flap is fastened down with press studs. The canopy fabric is then arranged to give a relatively square shape to the corners.

- The pull-up cords are passed through the grommets in the top and bottom flaps as illustrated in Fig. below:

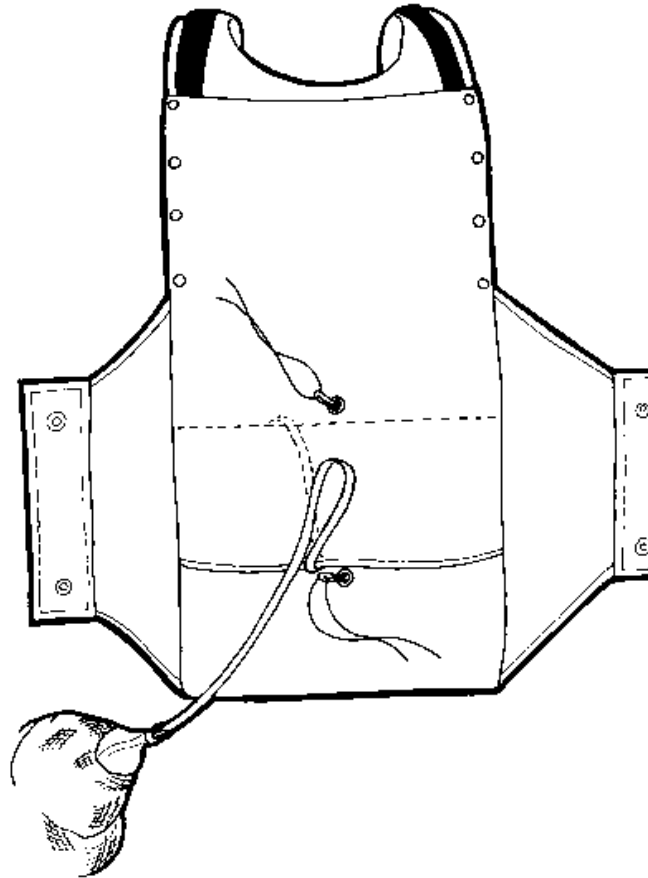


- Centre the pilot chute base on the circular raised disc on the stiffener plate between the two closing loops and compress the spring.
- Pass the pull-up cords through the grommets on the pilot chute location strap and use 2 temporary pins to retain the pilot chute in place.

NOTE: After 7th January 1988 a Skyhook, Part Number B021-A became available with the grommets set into the pilot chute top. The B021-A may be used as an alternative to the B021 and strap in all models.

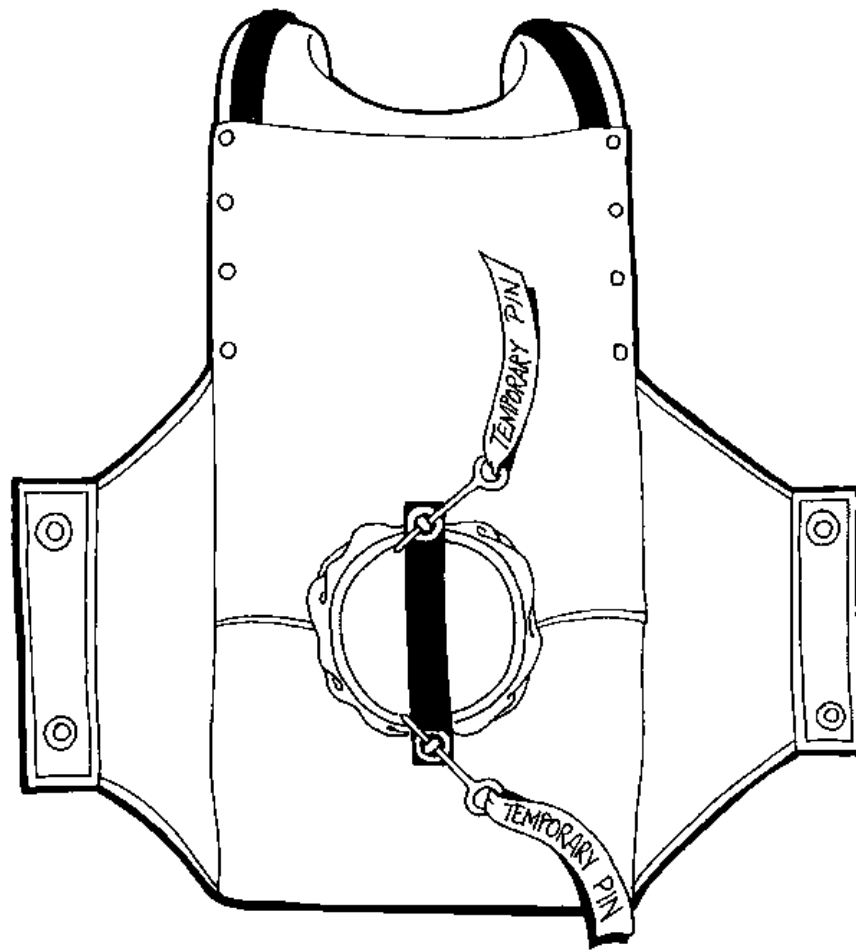

- Next, close the side flaps over the pilot chute. Pass the pull-up cords through the left, then right side flap and insert the two temporary pins to hold the flap closed.
- Insert the ripcord pins beside the temporary pins, starting with the bottom one first.

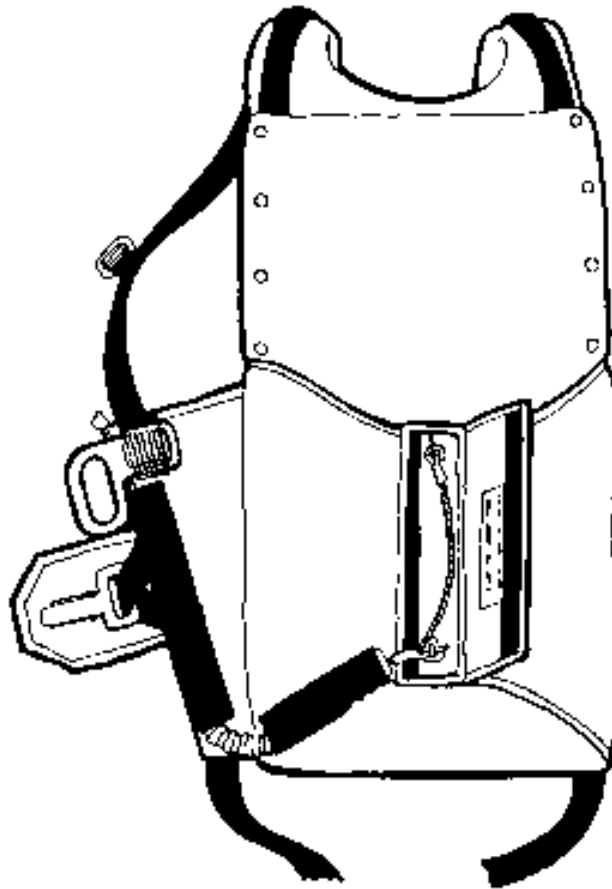

- Remove the temporary pins and pull-up cords.
- Enter packing details in the Packing Card log for the parachute.
- Account for all pull-up cords and temporary pins!

Replacement packing cards are available from Parachutes Australia by ordering part number A029.

11-0 CONTINUING PRODUCT SUPPORT

Parachutes Australia will maintain product support for the service life of the parachute.

Spare parts and materials shall be kept available to permit all types of repairs and modifications to be carried out on the parachute, both at the manufacturer's premises and at authorised maintenance establishments.

A Master Record Index (MRI) which fully defines the built standard of the parachute will be maintained by Parachutes Australia for the life of the parachute.

Parachutes Australia will notify maintenance organisations which subscribe to the Australian Parachute Federation Rigging Advisory Circular (RAC) service of every modification, change of approval, change of operational, maintenance or packing instruction which affects the Thinback parachute.

12-0 REPLACEMENT PARTS AND MATERIALS

ASSEMBLY COMPLETE SUB-ASSEMBLY PART MATERIAL	DESCRIPTION
T101	T101 Thinback Parachute assembly, low speed category, civil use. Refer to section 2.0 Thinback configurations.
T102	T102 Thinback Parachute assembly, standard category, civil use. Refer to section 2.0 Thinback configurations.
T104	T102 Thinback Parachute assembly, static line/ripcord deployed, civil use. Refer to section 2.0 Thinback configurations.
S005 (A)	Thinback Pack and Harness assembly, civil use, ripcord deployment only, standard category. Left hand inboard ripcord pull.
S0005-G	Thinback Pack and Harness assembly, civil use, static line/ripcord deployment, standard category. Left hand inboard ripcord pull.
P008A	Canopy, 26ft dia, Lopo conical, block constructed, standard category, orange and white alternating gores.
P015-1	Canopy, Aerolite 22ft dia conical, zero porosity, block constructed, low speed category, multi-coloured, 'flat' diaper deployed.
B021	Pilot chute, skyhook, 30 inch enclosed spring, 6 inch dia top, 4 inch diameter base, high drag.
B021 (S)	Strap, pilot chute B021 for use in Thinback pack and harness assemblies (excluding model T104)
B021-A	Pilot chute, skyhook, especially manufactured for Thinback model T104. May be used in all model Thinbacks and Slimpacks, incorporates shaped top with grommets included.
B019	Bridle cord, 1 metre length, ½ inch tubular nylon.
A043	Manual Thinback Parachutes model T101, T102 and T104.
H006	Ripcord for Thinback pack and harness model S0005 (A).
H006-1	Ripcord for Thinback pack and harness model S0005-G.
B074	Static line, Thinback model S0005-G.
B077	Closing loop(s), Thinback model S0005-G.

ASSEMBLY COMPLETE SUB-ASSEMBLY PART MATERIAL	DESCRIPTION
B045	Toggles (pair), P015-1 Aerolite and P008A Lopo Canopy.
B029 (F)	Diaper 'flat' Aerolite P015-1 canopy.
H008	Snap, quick ejector, non-adjustable MS 22017, CAD plated.
H009	Adapter, solid 3 bar, Parachute Harness shoulder adjustment, MS 22014-1.
H017 (21)	Housing, ripcord 21 inch length.
H036	Snap, Parachute Harness, MS 22044.
H042	Ring, V, adjustable, deep, Parachute Harness, MS 27765 (without spring tensioner).
H043	Cap, metal coated, pilot chute base location, pack and harness.
H057	Adjuster, chest strap, Parachute Harness.
H080	Link, rapide, size no. 6, standard series 'N' ref 6.0 N, zinc plated steel, SWL 400kg.
M011	Grommet and washer, parachute pack MS 20230, size no. 'O', spur tooth, rolled rim, nickel plated brass.
M015 (C)	Fastener, cap, super easy lift, pack and harness closure, black oxide finish.
M015 (P)	Fastener, post, super easy lift, pack and harness closure, black oxide finish.
M015 (SO)	Fastener, socket, super easy lift, pack and harness closure, black oxide finish.
M015 (ST)	Fastener, stud, super easy lift, pack and harness closure, black oxide finish.
M105 (L)	Spring, pilot chute, 30 inch length, 6 inch top, 4 inch base.
M121 (A)	Plate, stiffener, for pilot chute compression between pack base and closing flap.
M128	Grommet and washer, MS 20230, size 1, long shank, pack and harness inside back stiffener plate, loop location.
M129	Grommet and washer size 1, spur tooth, rolled rim, nickel plated.

ASSEMBLY COMPLETE SUB-ASSEMBLY PART MATERIAL	DESCRIPTION
M001	Cloth, nylon duck, pack construction, 400 denier, ¾oz urethane coating.
M009 (R)	Webbing, buffer strips, pack and harness, to MIL-W-27265, type 12, colour black.
M014 (25HK)	Tape, velcro, hook, 25mm wide.
M014 (25P)	Tape, velcro, pile, 25mm wide.
M014 (50HK)	Tape, velcro, hook, 50mm wide.
M014 (50P)	Tape, velcro, pile, 50mm wide.
M018 (D)	Line, rigging, aerolite canopy.
M021	Net, terylene, canopy, modification.
M022	Webbing, harness construction, to MIL-W-27265, type 7, colour black.
M031	Webbing, elastic, ripcord, pocket construction, 1½" width to MIL-W-5664, class 3, colour black, cotton & rubber.
M035	Tape, pack binding, to MIL-T-5038, type 3, width ¾ inch.
M036	Tape, ribbon weave, 1 inch, canopy lower band hem reinforcement, to MIL-T-5038, type 3.
M037	Tape, ribbon weave, ½ inch, canopy longitudinal seam reinforcement, to MIL-T-5038, type 3, class 1.
M038-1	Tape, square weave, 1 inch, pack & harness reinforcement to MIL-T5038, type 4, class 1 or 2.
M039	Tape, herringbone weave, 9/16 inch wide, for canopy line attachment loop, to MIL-T5038 type 5.
M042	Webbing, tubular nylon, ½ inch wide, to MIL-W-5625H, 1000lbs min strength, for bridle cord construction.
M043	Webbing, tubular nylon, 1 inch, gold, to MIL-W-5625H, 4000lbs min strength, for canopy apex vent hem reinforcement, 26' Lopo canopy.

ASSEMBLY COMPLETE SUB-ASSEMBLY PART MATERIAL	DESCRIPTION
M047	Thread, sewing, 5 cord nylon, unbonded, to MIL-V295D, size no. 5 cord, type 1, class 1, for harness construction.
M047-1	Thread, sewing, 5 cord nylon, unbonded, to MIL-V295D, size no. 5 cord, type 2, class 1, for harness construction.
M049	Line, braided nylon, canopy, rigging, 550 lb min strength to MIL-C-7515, type 2 or commercial equivalent.
M051-(colour)	Fabric, ripstop nylon, pilot chute top, 0-3 CFM 1.1oz, type F111 or equivalent.
M054-white	Fabric, ripstop nylon, canopy construction, 1.1oz to MIL-C-7020G, type 1 calandered to 30-50 CFM, 47 inch wide, white.
M054-orange	Fabric, ripstop nylon, canopy construction, 1.1oz to MIL-C-7020G, type 1 calandered to 30-50 CFM, 47 inch wide, orange.
M068 (N)	Sheet, nylon, 1.5mm thick, colour natural, pack & harness back inside stiffener.
M074	Tape, kevlar, aerolite upper & lower lateral bands.
M076	Webbing, nylon, 2 inch wide to MIL-W-4088 type 24, for grommet reinforcement, pack construction.
M081	Mesh, internal reinforcing, pack assembly, firm finish, colour natural.
M087	Elastic, cotton, 1 inch, webbing end stowage, to MIL-W5664, 70% cotton, 30% rubber, colour black.
M092	Thread, sewing, nylon bonded for canopy, pack & pilot chute construction, to MIL-V-295D, size no. 'E' thread or commercial equivalent.
M101	Foam, plastic, pack & harness comfort pad, ½ inch thick.
M171	Label, TSO C23b details.
M023	Webbing, buffer webbing, harness construction, to MIL-W-27265, type 8, colour black.
M138-2	Nitrile rubber 'O' ring for Aerolite P015-1 diaper locking stows.
M126	Cordura cloth, parachute pack construction.

